


TECHNICAL DATA SHEET

VIKU Protection FR White

250g/m² | 1,8mm

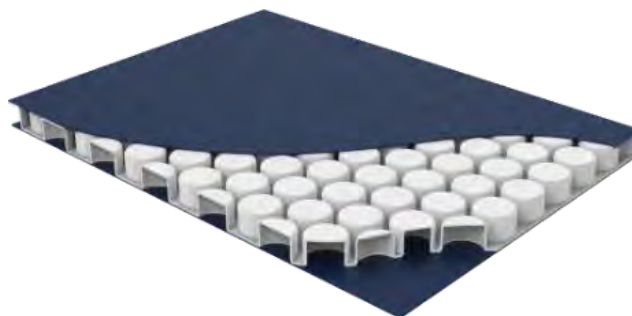

Properties	Units	Values	Test Method / Norm
Grammage	g/m ²	250	
Thickness	mm	1,8	
Finish type	---	standard	
Density	Kg/m ³	139	
Elastic Modulus	MPa	2,75	Iso 178
Resistance to bending	MPa	0,51	Iso 178
Chemical resistance	PP typical		
Odour (2h at 110° C)	No perceptible odour		

 Wide Operating-Temperature range	 Water, oils, and chemicals resistance	 100% Polypropylene 100% Recyclable
--	---	--

Standard Tolerances	Weight ± 10%	Thickness ± 5%	Width ± 1%	Lenght ± 2%
---------------------	-----------------	-------------------	---------------	----------------

